


CP220i Performance Curve



RECOMMENDED OPERATING RANGE

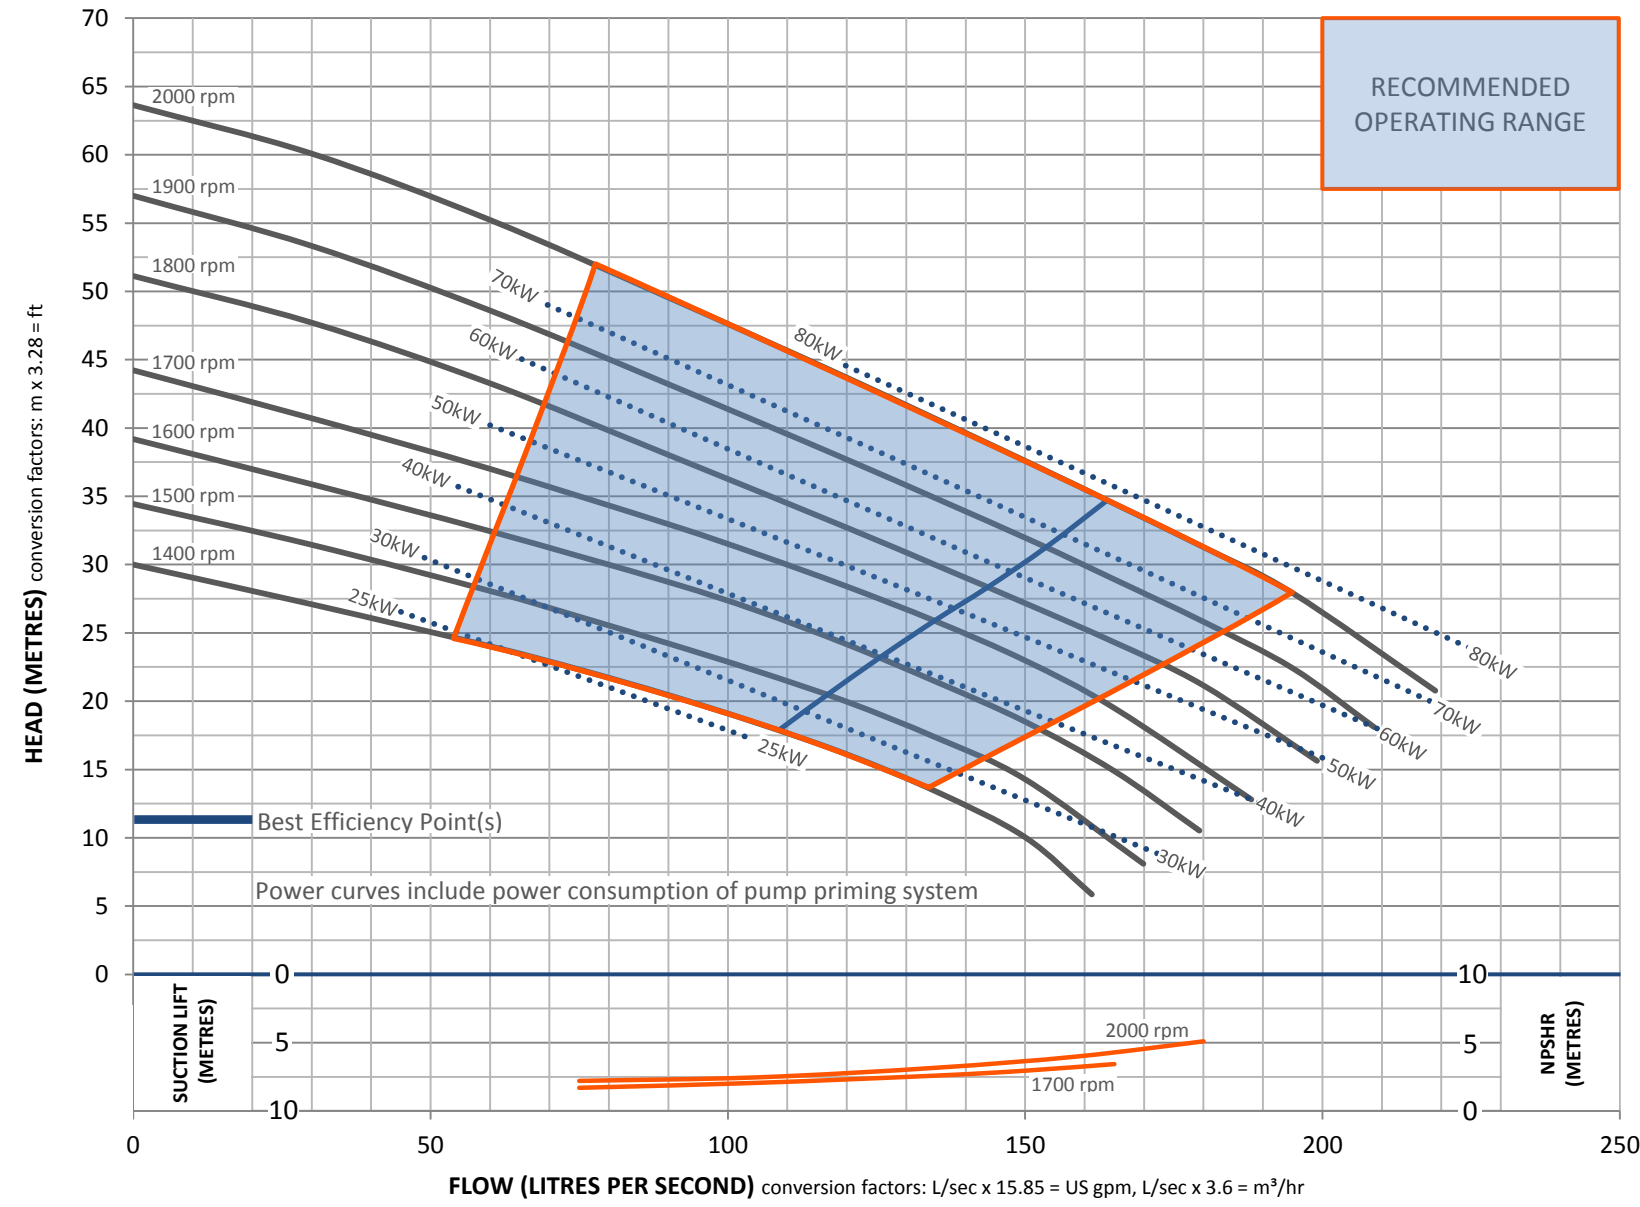

WATER

PUMPEND:

CP220i

IMPELLER DIA:

320mm

SOLID HANDLING SIZE:

80mm

SUCTION SIZE:

200mm

DISCHARGE SIZE:

200mm

Revision: 1 26-03-14

¹Performance to AS2417/ISO9906 Grade 2 for clear, cold (15°C) water at sea level. Other liquids may require performance adjustments.
²Performance curves do not include discharge check or non return valve losses.