


CP150i Performance Curve



RECOMMENDED
OPERATING
RANGE

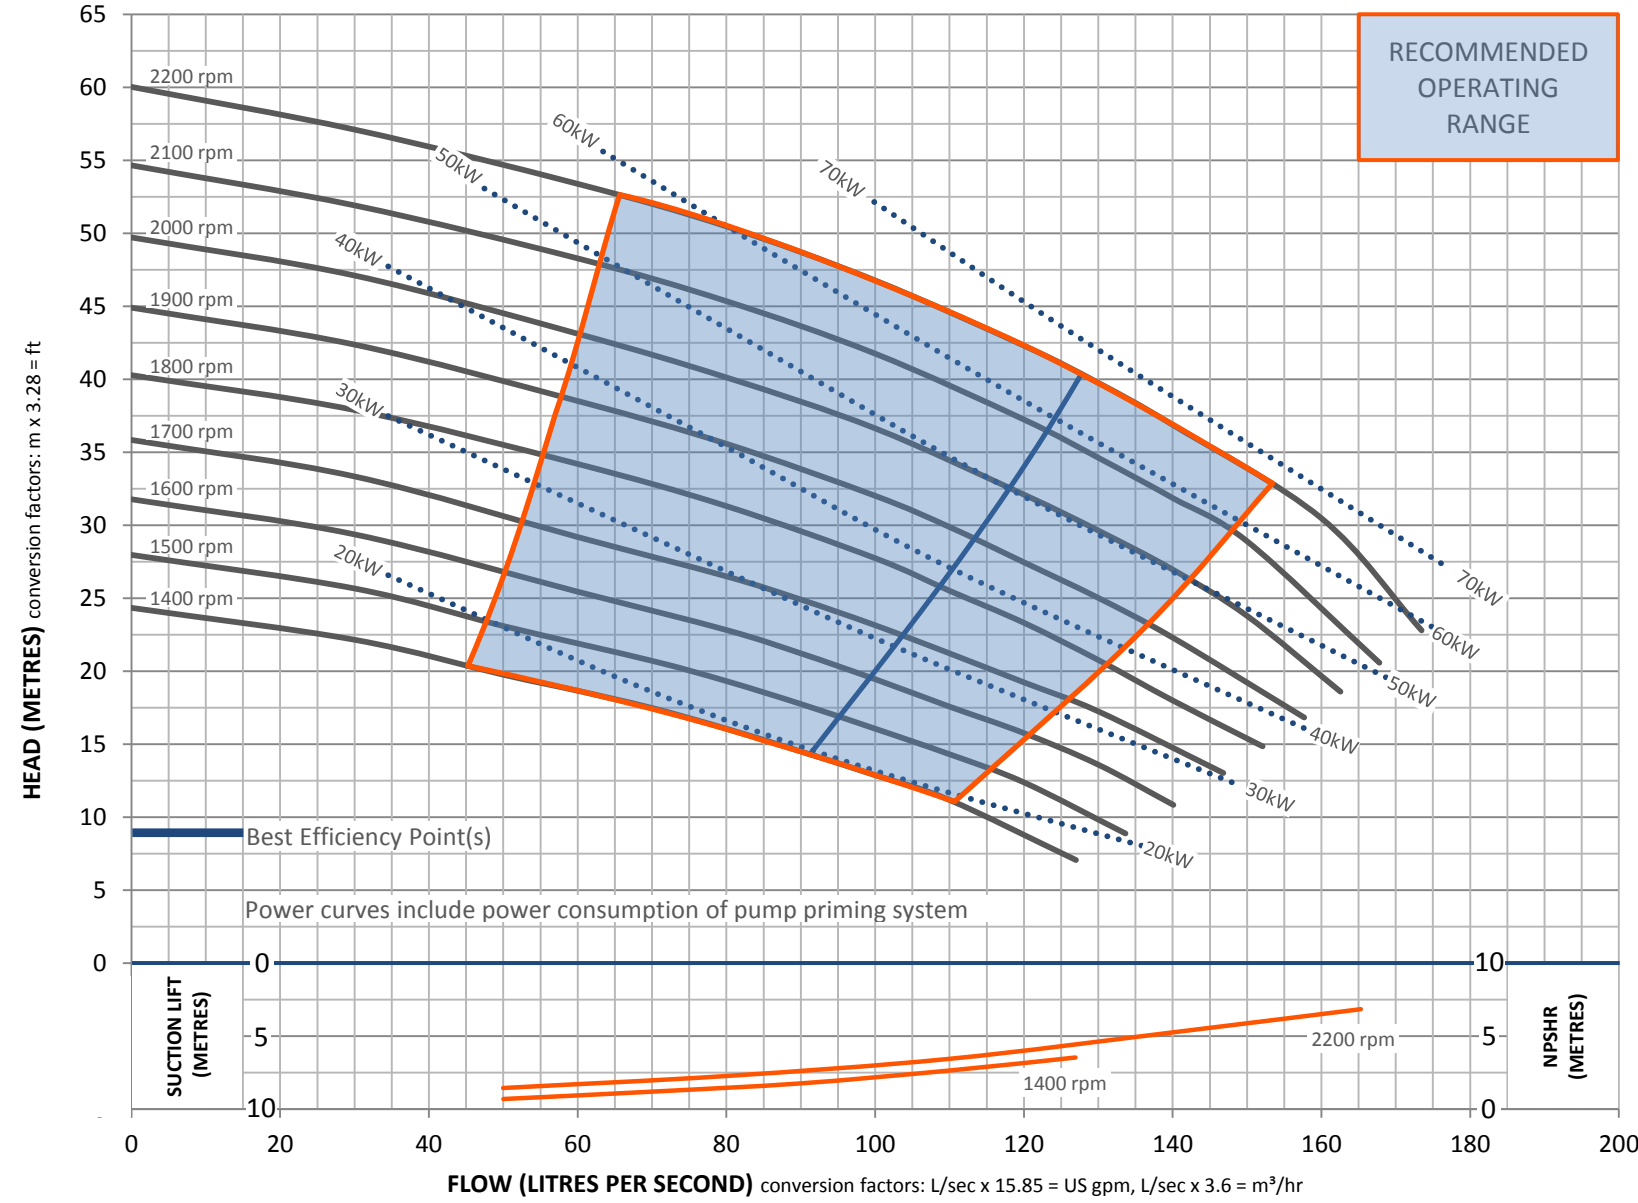

WATER

PUMPEND:

CP150i

IMPELLER DIA:

285mm

SOLID HANDLING SIZE:

77mm

SUCTION SIZE:

150mm

DISCHARGE SIZE:

150mm

Revision: 1 21-03-14

SYKES

¹Performance to AS2417/ISO9906 Grade 2 for clear, cold (15°C) water at sea level. Other liquids may require performance adjustments.
²Performance curves do not include discharge check or non return valve losses.